

COPA-H

固定座
Mounting clip

+90°C +194°F
-40°C -40°F

Material: PA6 MOD V0 SGA



- 带底座固定座, 适配FIPLOCK®标准波纹管细波形和粗波形
- 适用于需要防止扭转的场合
- 合理的上盖设计, 保证了很高的拔脱力
- 底座设计保证了很高的安装强度
- mounting clip with base for FIPLOCK® corrugated conduits with fine and coarse profile
- for anti-twist applications
- resealable cover connected to the clip provides high pull-out forces
- reinforced base plate offers excellent grip

温度范围 / Temperature range

UV-防护 / UV protection


低温性能 / Cold environment performance

机械强度 / Mechanical strength


min.				max.			




产品号 Part No. ¹⁾		名义尺寸 Nominal width	波型 Profile ²⁾	尺寸 Dimensions in mm										重量 Weight	包装单元 PU	
黑色 / black	灰色 / grey	NW		A	B	C	D	E	F	G	H	K	W	M	g	个 / Pcs
COPA-H-10B	COPA-H-10G	10	F	22,0	14,0	20,0	23,0	31,0	-	10,0	25,0	16,0	50,3	5	4,8	10
COPA-H-12B	COPA-H-12G	12	F	26,0	14,0	20,0	23,0	31,0	-	10,0	27,0	16,5	58,3	5	5,8	10
COPA-H-17B	COPA-H-17G	17	F/C	35,5	14,0	20,0	27,0	36,0	12,5	25,0	34,0	20,0	73,5	6	7,8	10
COPA-H-23B	COPA-H-23G	23	F/C	40,0	14,7	22,5	28,5	38,5	15,0	30,0	42,0	24,0	86,3	6	10,6	6
COPA-H-29B	COPA-H-29G	29	F/C	46,5	14,7	22,5	29,5	40,0	17,5	35,0	48,0	27,0	99,3	6	12,8	6
COPA-H-36B	COPA-H-36G	36	F/C	55,0	14,7	24,5	49,5	60,0	20,0	40,0	56,0	31,0	116,3	6	18,5	4
COPA-H-48B	COPA-H-48G	48	F/C	67,0	14,7	24,5	49,5	60,0	22,5	45,0	68,0	37,0	140,3	6	24,9	4

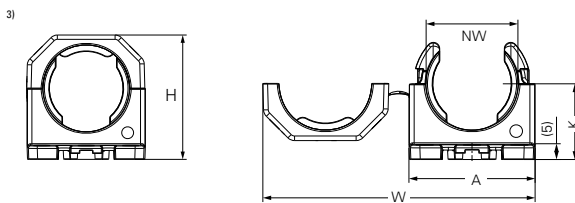

仅用于 NW 10 和 12
Only for NW 10 und 12



用于 NW 17-48
For NW 17-48

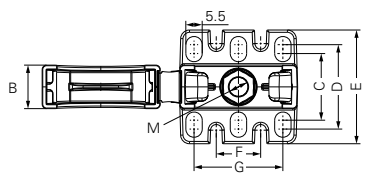

您可以通过以下地址查询更多的技术信息 / You can find more technical information here

CADENAS - 产品CAD数据目录 / eCATALOG solutions electronic CAD catalog: <https://fraenkische-ip.partcommunity.com>

¹⁾ FIPLOCK® 附件编码规则 / Part numbering key for FIPLOCK® accessories: www.fraenkische-ip.com/fiplock-accsy-part-no

²⁾ 波纹管波型 / Conduit profiles: www.fraenkische-ip.com/fipsystems-profiles

³⁾ FIPLOCK® COPA-H 组装说明 / Assembly instruction for FIPLOCK® COPA-H: www.fraenkische-ip.com/assembly-fiplock-copa



COPA-H 产品性能 / Product performances

应用性能 Application performances	特性 Characteristics	单位 Unit	规范标准 Standards, specifications	备注 Remark
温度范围 / Temperature range	-40 到 / to +90 -40 到 / to +194	°C °F	IS FIP	

防火性能 / Fire safety performances				
不含卤素和镉 / Free from halogens and cadmium	是 / yes			
阻燃等级 / Fire classification	V2		UL 94	
垂直燃烧测试 / Vertical burning behavior	Vi<100 自熄 Vi<100 self-extinguishing	mm/min	EN ISO 6941:2003	ECE R-118-02 附录 8 ECE R-118-02 annex 8

耐候性 / Weathering performances				
UV- 及耐候性能 UV and weathering performance	非常好 very good		IS FIP	15 到 20 年 15 to 20 years
防锈测试 Corrosion test	符合 / compliant		DIN EN ISO 9227:2017-07 DIN EN ISO 13018:2016-06	

测试条件参照EN ISO 139 , 温度 23°C / 湿度50% r. h. (如未注明测试条件). IS FIP = FIP内部测试规范
Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated differently). IS FIP = Internal Specification FIP

我们尽我们的知识水平所提供的数据, 图片和技术规格图档反映了当前的工程技术水平。这并不包含对最后应用有关的任何责任。产品用户需根据应用要求自行进行评估。以确定产品是否符合特殊应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权利。例如更改材料和加工工艺, 在保证产品性能数值不下降的情况下不会另行通知。

The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.