

## NEPA-M

圆形  
Thread enlarger

+100°C +212°F  
-40°C -40°F

材料: 尼龙玻纤增强  
Material: polyamide glass fibre reinforced



- 塑料公制螺纹扩展头, 适用平扳手
- 适配FIPLOCK® ONE 公制螺纹接头

- thread enlarger plastic with metric threads and hexagon for flat wrench
- suitable for FIPLOCK® ONE fittings with metric threads

温度范围 / Temperature range

UV-防护 / UV protection


低温性能 / Cold environment performance

机械强度 / Mechanical strength

min.				max.			
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■



产品号 Part No. <sup>1)</sup>	外螺纹 Outer thread	内螺纹 Outer thread	尺寸 Dimensions in mm						包装单元 PU 个 / Pcs
			SW	ØA	C	D	E	F	
灰色 / grey	M1	M2							
NEPA-M12M16G-H	M12	M16	20,0	22,0	27,0	9,0	15,5	6,0	10
NEPA-M16M20G-H	M16	M20	24,0	27,0	27,0	9,0	15,5	10,0	10
NEPA-M20M25G-H	M20	M25	29,0	32,0	27,0	9,0	15,5	14,0	10
NEPA-M25M32G-H	M25	M32	36,0	40,0	28,0	10,0	15,5	19,0	6
NEPA-M32M40G-H	M32	M40	46,0	51,0	30,0	12,0	15,5	26,0	6
NEPA-M40M50G-H	M40	M50	55,0	61,0	30,0	12,0	15,5	32,0	4
NEPA-M50M63G-H	M50	M63	68,0	75,0	32,0	14,0	15,5	42,0	4

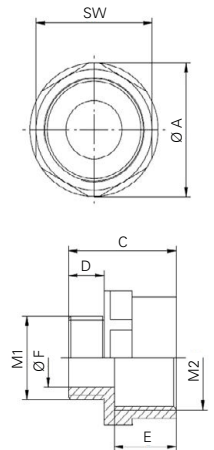

您可以通过以下地址查询更多的技术信息 / You can find more technical information here

CADENAS – 产品CAD数据目录 / eCATALOG solutions electronic CAD catalog: <https://fraenkische-ip.partcommunity.com>

<sup>1)</sup> FIPLOCK® 附件编码规则 / Part numbering key for FIPLOCK® accessories: [www.fraenkische-ip.com/fiplock-accsy-part-no](http://www.fraenkische-ip.com/fiplock-accsy-part-no)



# NEPA-M 产品性能 / Product performances

应用性能 <i>Application performances</i>	特性 <i>Characteristics</i>	单位 <i>Unit</i>	规范标准 <i>Standards, specifications</i>	备注 <i>Remark</i>
温度范围 / <i>Temperature range</i>	-40 bis / <i>to</i> +100 -40 bis / <i>to</i> +212	°C °F	IS FIP	

防火性能 / <i>Fire safety performances</i>				
不含卤素和镉 / <i>Free from halogens and cadmium</i>	是 / <i>yes</i>			
阻燃等级 / <i>Fire classification</i>	HB		UL 94	
火焰蔓延 / <i>Spread of fire</i>	非火焰蔓延 <i>non flame propagating</i>		IEC EN 61386	

耐候性 / <i>Weathering performances</i>				
UV- 及耐候性能 <i>UV and weathering performance</i>	好 <i>good</i>		IS FIP	8 到 10 年 <i>8 to 10 years</i>

测试条件参照EN ISO 139 , 温度 23°C / 湿度50% r. h. (如未注明测试条件). IS FIP = FIP内部测试规范  
*Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated differently). IS FIP = Internal Specification FIP*

我们尽我们的知识水平所提供的数据, 图片和技术规格图档反映了当前的工程技术水平. 这不包含对最后应用有关的任何责任. 产品用户需根据应用要求自行进行评估. 以确定产品是否符合特殊应用条件. 我们对产品的责任只考虑一般规定条件下的水平. FIP保留对产品数据和数值进行技术调整的权力. 例如更改材料和加工工艺, 在保证产品性能数值不下降的情况下不会另行通知.

*The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.*